

21" PUBLIC VIEW MONITOR

Wren PVMs offer a powerful deterrent and deliver top-notch video quality for forensic purposes, making them a smart investment that perfectly aligns with your budget.


Wren's PVMs enhance the deterrence value in targeted areas with superior attention grabbing features such as flashing LED lights and face blocking by increasing the notice-ability of the monitor. Equipped with high definition video, a PVM provides a clear impression of control to shoppers and assists in forensic investigations.

FEATURES

- 5MP WDR Camera with Varifocal Lens for Superior Image Quality
- Remote Zoom and Focus Capabilities for Simple Set up
- Power-over-Ethernet (PoE) Capable for Easy Installation
- Attention Grabbing Features Deliver High Deterrent Value
- UL Listed

SPECIAL FEATURES

- Remote Varifocal Setting and Auto-Focus
- Faceblocking
- Video Motion Detection
- White LEDs (On, Off, Flashing, Motion On, Motion Flash)

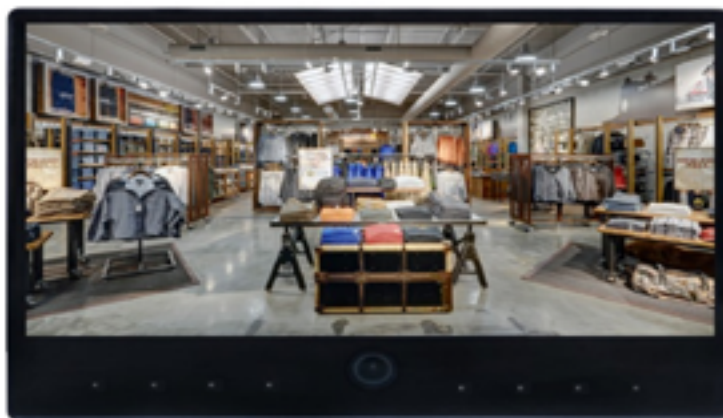

PROFESSIONAL SERVICES

- Expert support for location design and seamless implementation, ideal for large-scale deployments.
- Installation guides and specifications
- North America customer support




ABOUT 3Si

- **53 years** of experience and specialized knowledge in the **Security field**
- **24/7 US-based support**
- **Long-term relationships** with the industry, built on **trust and satisfaction**
- Partnered with over **10,200 law enforcement agencies**
- Over **19,000 criminals** apprehended and **\$150M in assets recovered**

OUR END-TO-END SOLUTION



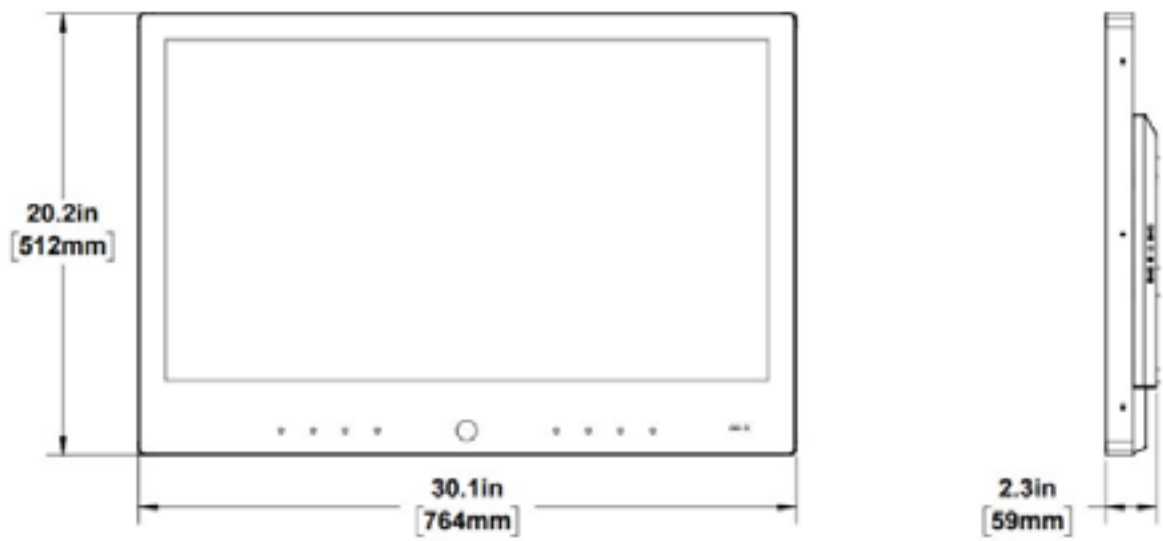

MODEL NUMBER	PVM21-B-2094-B
Mechanical	
Housing Material	Steel
Color	Black Steel Housing, Black Screen
Weight	11.2 lbs.
Product Dimensions	19.80" L X 14.20" W X 1.8" D
Mounting	VESA 100X100mm or 200x100mm pattern
Display	
Size	21.5 in.
Type	LCD
Backlight	LED
Resolution	1920x1080
Aspect Ratio	16:9
Camera	
Sensor	1/2.7" OmniVision OS05A20
Connections	
SD Card	Recording, Firmware, and Logo Updates
RJ45	IP Camera, PoE
Digital I/O	Spring Terminal (2X)
DC Power Input	Terminal Block +/- (2 position)
HDMI	Input for external video source
Electrical	
PoE	POE++ or POE Class 6
DC	24VDC
Environmental	
Operating Temperature	32°F - 104°F (0°C - 40°C)
Certifications	
UL	
FCC	

XXXXXXXXXX
Rev B 5/25

