

# AXIS 43" PUBLIC VIEW MONITOR

**Wren PVMs offer a powerful deterrent and deliver top-notch video quality for forensic purposes, making them a smart investment that perfectly aligns with your budget.**

Wren's PVMs enhance the deterrence value in targeted areas with superior attention grabbing features such as flashing LED lights and face blocking by increasing the notice-ability of the monitor. Equipped with high definition video, a PVM provides a clear impression of control to shoppers and assists in forensic investigations.

## FEATURES

- 1080P resolution
- Commercial Grade for 24/7 Use
- Auto-on Feature Eliminates Re-setting Monitor After Power Failures
- PoE++ 802.3bt (type 4) 90W capable
- UL Listed
- Power Supply not Included



## PROFESSIONAL SERVICES

- Expert support for location design and seamless implementation, ideal for large-scale deployments.
- Installation guides and specifications
- North America customer support



## ABOUT 3Si


- **53 years** of experience and specialized knowledge in the **Security field**
- **24/7 US-based support**
- **Long-term relationships** with the industry, built on **trust and satisfaction**
- Partnered with over **10,200 law enforcement agencies**
- Over **19,000 criminals** apprehended and **\$150M** in assets recovered

## OUR END-TO-END SOLUTION

  
Camera & Video  
Hardware

**WREN**  
BY **3Si**

+

  
GPS  
Tracking


**COVERT**  
BY **3Si**

+

  
Video Management  
Systems

**SURVEILL**  
BY **3Si**



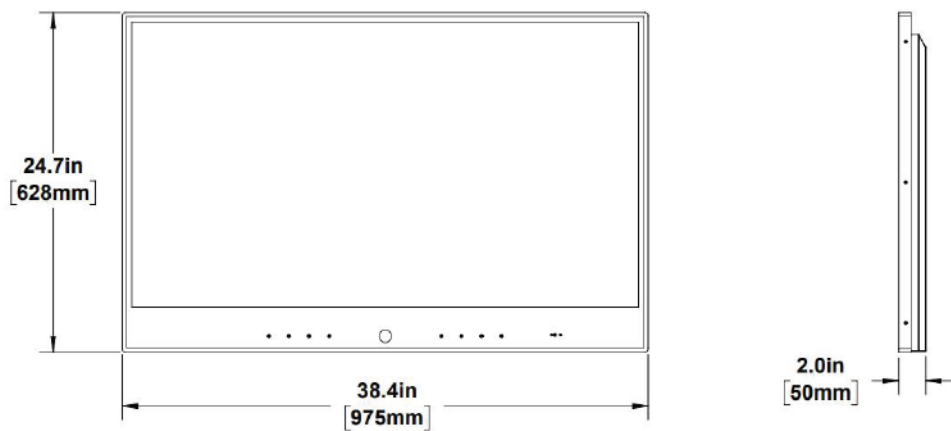

MODEL NUMBER PVM43-1AFA51-W	
<b>Mechanical</b>	
Housing Material	Aluminum
Color	White Housing, Black Screen
Weight	37.5 lbs.
Product Dimensions	38.4" L X 2.0" W X 24.7" T
Mounting	VESA 400x400mm pattern
<b>Display</b>	
Size	43 in.
Type	LCD
Backlight	LED
Resolution	1920x1080
Aspect Ratio	16:9
<b>Camera</b>	
Sensor	Axis FA51 with FA1105
<b>Connections</b>	
SD Card	OSD, Recording, Firmware, and Logo Updates
RJ45	IP Camera, PoE
Digital I/O	Spring Terminal (2X)
DC Power Input	Terminal Block +/- (2 position)
HDMI	Input for external video source
<b>Electrical</b>	
PoE++	802.3bt (type 4) 90W
DC	24VDC
<b>Environmental</b>	
Operating Temperature	32°F - 104°F (0°C - 40°C)
<b>Certifications</b>	
UL	
FCC	

71-0100-010  
Rev C 05/25

